



OUTLINE

The OMS261 series is a lithium-ion/lithium polymer rechargeable battery protection IC, using high voltage CMOS process and including high-accuracy voltage detectors and delay circuit.

The OMS261 series is suitable for detection and protection of single-cell Lithium-polymer or Lithium-ion battery packs from overcharge, Overdischarge, overcurrent, and short circuit status.

FEATURES

(1) Internal high accuracy voltage detection circuit

Overcharge detection voltage	3.5~4.7V	Accuracy±25mV (Ta=+25°C) Accuracy±30mV (Ta=-10~+60°C)
Overcharge release voltage	3.5~4.7V	Accuracy±50mV
Overdischarge detection voltage	1.8~3.2V	Accuracy±40mV
Overdischarge release voltage	1.8~3.2V	Accuracy±50mV
Discharging overcurrent detection voltage	+20~300mV	Accuracy±10/15mV
Charging overcurrent detection voltage	-20~300mV	Accuracy±20mV
Short detection voltage	0.50~1.5V	Accuracy±150mV

(2) Detection delay times are generated by an internal circuit.

(3) 35V High-withstanding-voltage device is used for charger connection pins.

(4) 0V battery charge function “Allow” or “Inhibit”.

(5) Standby function “Available” and “Unavailable”.

(6) Wide operating temperature range Ta=-40°C~+85°C

(7) Low current consumption (Ta=+25°C)

Operation mode	3.0μA typ., 5μA Max.
Power down mode	0.1μA Max.

(8) Ultra small package SOT-23-6

(9) Lead-free, Halogen-Free, Green packaging.

APPLICATIONS

Lithium-ion/ Lithium polymer rechargeable battery pack.

High precision protectors for cell-phones and any other gadgets using on board Lithium-ion/ Lithium polymer battery pack.



BLOCK DIAGRAM

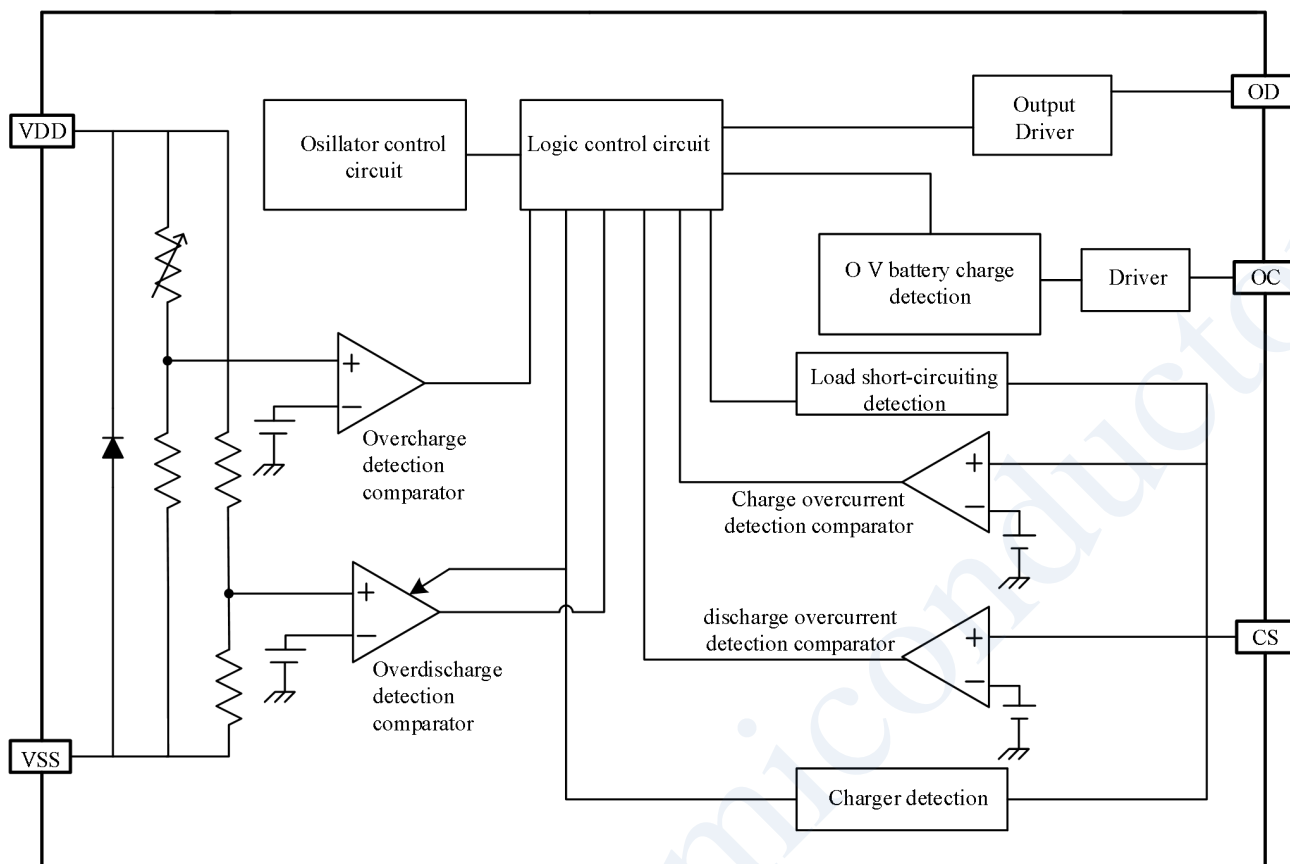


Figure 1



PRODUCT NAME & PARAMETER

Table 1(1/2)

Product Name	Overcharge detection voltage	Overcharge release voltage	Overdischarge detection voltage	Overdischarge release voltage	Discharging overcurrent detection voltage	Charging overcurrent detection voltage	Short detection voltage
	V _{CU} (V)	V _{CR} (V)	V _{DL} (V)	V _{DR} (V)	V _{DIP} (mV)	V _{CIP} (mV)	V _{CIP} (mV)
OMS261-GN	4.275	4.175	2.30	2.40	100	-100	1.20
OMS261-JB	4.425	4.225	2.50	2.90	160	-160	0.70
OMS261-AA	4.280	4.080	3.00	3.00	80	-100	0.50
OMS261-GM	4.280	4.080	2.80	2.80	100	-100	1.20
OMS261-GJ	4.325	4.075	2.50	2.90	150	-100	1.20
OMS261-GP	4.200	3.900	2.50	3.00	200	-200	0.80
OMS261-AI	4.280	4.180	3.00	3.00	180	-150	0.60
OMS261-AW	4.280	4.080	3.00	3.30	80	-80	0.50
OMS261-AX	4.280	4.080	2.80	3.00	100	-100	0.50
OMS261-G3P	4.200	4.100	2.80	2.90	150	-200	0.50
OMS261-AM	4.400	4.350	3.00	3.20	250	-200	0.60
OMS261-JJ	4.280	4.080	3.00	3.00	80	-100	1.20
OMS261-OB	4.400	4.200	2.80	3.00	150	-200	0.85
OMS261-MB	4.280	4.280	2.80	2.80	250	-100	0.85
OMS261-GE	3.900	3.800	2.00	2.30	100	-100	1.20
OMS261-AT	3.650	3.450	2.10	2.30	150	-150	0.50
OMS261-FA	4.500	4.300	2.10	2.50	90	-90	0.50
OMS261-FK	4.475	4.275	2.50	2.90	125	-125	0.50
OMS261-FS	4.425	4.225	2.50	2.90	125	-125	0.50
OMS261-HQ	4.280	4.130	2.80	3.10	150	-100	0.50
OMS261-KB	4.250	4.150	2.80	3.00	150	-100	0.50
OMS261-UB	4.475	4.275	2.50	2.80	150	-150	0.50
OMS261-MQB	4.405	4.305	2.80	3.00	250	-100	0.50
OMS261-MQ	4.405	4.305	2.80	3.00	150	-150	0.50
OMS261-GQ	4.275	4.075	2.50	2.90	250	-100	0.50
OMS261-GKA	4.275	4.075	2.50	2.90	150	-100	0.50
OMS261-HSA	4.280	4.080	3.00	3.00	150	-150	0.50
OMS261-CN	4.250	4.150	2.80	3.00	150	-100	0.50
OMS261-HQB	4.28	4.13	2.8	3.1	100	-100	0.5
OMS261-QKB	4.475	4.275	2.5	2.5	200	-150	0.5
OMS261-NKA	4.425	4.225	2.5	2.8	200	-200	0.5



Lithium-ion / lithium polymer battery protection IC for single cell pack

Delay Time

Table 1(2/2)

Product Name	Overcharge Delay Time	Overdischarge Delay Time	Discharge Overcurrent Delay Time	Charge Overcurrent Delay Time	Short current Delay Time	0 V battery charges function	Power down function
	T _{OC} (ms)	T _{OD} (ms)	T _{DIP} (ms)	T _{CIP} (ms)	T _{SIP} (μs)	function	
OMS261-GN	1200	144	9	7	300	Allow	Available
OMS261-JB	1000	96	12	10	300	Allow	Available
OMS261-AA	1000	128	8	8	300	Allow	Available
OMS261-GM	1200	144	9	7	300	Allow	Available
OMS261-GJ	1200	144	9	7	300	Inhibit	Available
OMS261-GP	1000	20	12	8	300	Allow	Available
OMS261-AI	1000	256	16	8	300	Allow	Available
OMS261-AW	1000	128	8	8	300	Allow	Unavailable
OMS261-AX	1000	128	8	8	300	Allow	Unavailable
OMS261-G3P	1200	144	9	7	300	Allow	Available
OMS261-AM	1000	256	16	8	300	Allow	Available
OMS261-JJ	1200	144	9	7	300	Allow	Available
OMS261-OB	1200	144	12	8	300	Allow	Unavailable
OMS261-MB	1200	144	12	8	300	Allow	Unavailable
OMS261-GE	1200	144	8	8	300	Allow	Available
OMS261-AT	1000	64	8	8	300	Allow	Unavailable
OMS261-FA	1000	96	32	16	300	Allow	Unavailable
OMS261-FK	1000	96	12	16	300	Allow	Unavailable
OMS261-FS	1000	96	12	16	300	Allow	Unavailable
OMS261-HQ	1200	150	9	9	300	Inhibit	Available
OMS261-KB	1200	150	9	9	300	Allow	Unavailable
OMS261-UB	1000	20	12	16	300	Allow	Unavailable
OMS261-MQB	1000	125	8	8	300	Allow	Available
OMS261-MQ	1000	20	12	16	300	Allow	Available
OMS261-GQ	1200	150	9	9	300	Inhibit	Available
OMS261-GKA	1200	150	9	9	300	Inhibit	Available
OMS261-HSA	1000	20	12	16	300	Allow	Available
OMS261-CN	1200	150	9	9	300	Allow	Available
OMS261-HQB	1200	150	9	9	300	Inhibit	Available
OMS261-QKB	1000	20	12	16	300	Allow	Available
OMS261-NKA	1000	20	12	16	300	Allow	Unavailable


Remark:

About accuracy of electrical parameter, Please refer to Table 4 & Table 5.



PIN CONFIGURATIONS

Table 2 Pin description

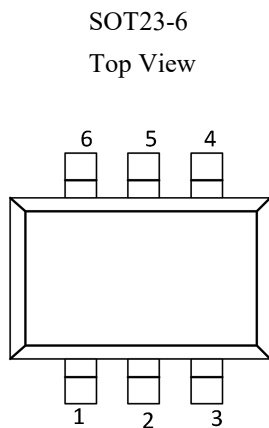

Pin No.	Symbol	Description
1	OD	FET gate control pin for discharge (CMOS output)
2	CS	Overcurrent / charger detection
3	OC	FET gate control pin for charge (CMOS output)
4	NC	Not used
5	V _{DD}	Positive power input
6	V _{SS}	Negative power input

The NC pin is set to Potential open, or set to V_{DD} or V_{SS}.

However, do not use it as the function of electrode.

Ordering Information

Part Number	Package Type	Package Qty
OMS261 series	SOT-23-6	3000



ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Applied pin	Absolute Maximum Rating	Unit
Input voltage between V_{DD} and V_{SS}	V_{DS}	V_{DD}	$V_{SS}-0.3 \sim V_{SS}+10$	V
Input pin voltage for CS	V_{CS}	CS	$V_{DD}-35 \sim V_{DD}+0.3$	V
Output pin voltage for OD	V_{OD}	OD	$V_{SS}-0.3 \sim V_{DD}+0.3$	V
Output pin voltage for OC	V_{OC}	OC	$V_{CS}-0.3 \sim V_{DD}+0.3$	V
Operation temperature range	T_{opt}	-	-40~+85	°C
Storage temperature range	T_{stg}	-	-40~+125	°C
Power dissipation	P_D	-	250 (When not mounted on board)	mW

Table 3

(Ta=+25°C unless otherwise specified)

Caution:

The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.



ELECTRICAL CHARACTERISTICS

Table 4

(1) Except detection delay time table (Ta=+25°C unless otherwise Specified)

Parameter	Symbol	Test condition	Min.	Typ.	Max.	Unit
INPUT VOLTAGE, OPERATION VOLTAGE RANGE						
Operating voltage V_{DD} and V_{SS}	V_{DSOP1}	-	1.5	-	10	V
Operating voltage V_{DD} and CS	V_{DSOP2}	-	1.5	-	30	V
CURRENT CONSUMPTION						
Operation current consumption	I_{OPE}	$V_{DD}=3.5V, V_{CS}=0V$	-	3.0	5.0	μA
Overdischarge current consumption (Power down function "Unavailable")	I_{OPD}	$V_{DD}=1.5V, V_{CS}: 0V \text{ rise to } 1.5V$	-	-	3.0	μA
Power down Current consumption (Power down function "Available")	I_{OD}	$V_{DD}=1.5V, V_{CS}: 0V \text{ rise to } 1.5V$	-	-	0.1	μA
DETECTION VOLTAGE						
Overcharge Detection Voltage	V_{CU}	$T=25^{\circ}C$	$V_{CU}-0.025$	V_{CU}	$V_{CU}+0.025$	V
		$T= -5^{\circ}C \text{ to } 55^{\circ}C$	$V_{CU}-0.030$	V_{CU}	$V_{CU}+0.030$	V
Overcharge Release Voltage	V_{CR}	$V_{CR} \neq V_{CU}$	$V_{CR}-0.050$	V_{CR}	$V_{CR}+0.050$	V
		$V_{CR}=V_{CU}$	$V_{CR}-0.050$	V_{CR}	$V_{CR}+0.025$	V
Overdischarge Detection Voltage	V_{DL}	-	$V_{DL}-0.040$	V_{DL}	$V_{DL}+0.040$	V
Overdischarge Release Voltage	V_{DR}	$V_{DL}=V_{DR}$	$V_{DR}-0.050$	V_{DL}	$V_{DR}+0.040$	V
		$V_{DL} \neq V_{DR}$	$V_{DR}-0.050$	V_{DL}	$V_{DR}+0.050$	V
Discharge Overcurrent Detection Voltage	V_{DIP}	$V_{DD}=3.5V$	$V_{DIP}-10.0$	V_{DIP}	$V_{DIP}+10.0$	mV
		OMS261-0B	$V_{DIP}-15.0$	V_{DIP}	$V_{DIP}+15.0$	mV
Load short-Circuit Detection Voltage	V_{SIP}	-	$V_{SIP}-0.10$	V_{SIP}	$V_{SIP}+0.10$	V
Charge overcurrent detection voltage	V_{CIP}	-	$V_{CIP}-20.0$	V_{CIP}	$V_{CIP}+20.0$	mV
OD Pin Output "H" Voltage	V_{DH}	-	$V_{DD}-0.1$	V_{DH}	-	V
OD Pin Output "L" Voltage	V_{ODL}	-	-	V_{ODL}	0.5	V
OC Pin Output "H" Voltage	V_{CH}	-	$V_{DD}-0.1$	V_{CH}	-	V
OC Pin Output "L" Voltage	V_{CL}	-	-	V_{CL}	0.5	V
0V BATTERY CHARGE FUNCTION						
0V battery charger starting voltage (0V charger function "Allow")	V_{0CH}	0V battery charging function	1.2	-	-	V
0V battery inhibit charge voltage (0V charger function "inhibit")	V_{0CH}	0V battery charging function	0.5	-	1.2	V
OUTPUT IMPEDANCE OF CONTROL TERMINALS						
OD Pin Output impedance "H"	R_{DH}	$V_{DD}=3.5V, V_{OD}=3.0V, V_{CS}=0V$	2.5	5.0	10.0	$K\Omega$
OD Pin Output impedance "L"	R_{DL}	$V_{DD}=2.0V, V_{OD}=0.5V, V_{CS}=0V$	2.5	5.0	10.0	$K\Omega$
OC Pin Output impedance "H"	R_{CH}	$V_{DD}=3.5V, V_{OC}=3.0V, V_{CS}=0V$	2.5	5.0	10.0	$K\Omega$
OC Pin Output impedance "L"	R_{CL}	$V_{DD}=4.5V, V_{OC}=0.5V, V_{CS}=0V$	15.0	30.0	60.0	$K\Omega$
INTERNAL RESISTANCE						
Resistance between CS and V_{SS}	R_{CSS}	$V_{DD}=3.5V, V_{CS}=1.0V$	20.0	40.0	80.0	$K\Omega$
Resistance between CS and V_{DD}	R_{CSD}	$V_{DD}=1.8V, V_{CS}=0V$	100.0	300.0	900.0	$K\Omega$



Delay Time Combination (Ta=+25°C, unless otherwise specified)

Table 5

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Overcharge Delay Time	T _{OC}	-	T _{OC} *80%	T _{OC}	T _{OC} *120%	ms
Overdischarge Delay Time	T _{OD}	-	T _{OD} *80%	T _{OD}	T _{OC} *120%	ms
Discharge Overcurrent Delay Time	T _{DIP}	V _{DD} =3.5V, V _{CS} =0.35V	T _{DIP} *80%	T _{DIP}	T _{OC} *120%	ms
Charge Overcurrent Delay Time	T _{CIP}	V _{DD} =3.5V, V _{CS} =-0.3V	T _{CIP} *80%	T _{CIP}	T _{OC} *120%	ms
Short Circuit Delay Time	T _{SIP}	V _{DD} =3.5V, V _{CS} =1.6V	T _{SIP} *80%	T _{SIP}	T _{OC} *120%	μs

OMS261-OB

Table 6

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Overcharge Delay Time	T _{OC}	-	T _{OC} *70%	T _{OC}	T _{OC} *130%	ms
Overdischarge Delay Time	T _{OD}	-	T _{OD} *70%	T _{OD}	T _{OC} *130%	ms
Discharge Overcurrent Delay Time	T _{DIP}	V _{DD} =3.5V, V _{CS} =0.35V	T _{DIP} *70%	T _{DIP}	T _{OC} *130%	ms
Charge Overcurrent Delay Time	T _{CIP}	V _{DD} =3.5V, V _{CS} =-0.3V	T _{CIP} *70%	T _{CIP}	T _{OC} *130%	ms
Short Circuit Delay Time	T _{SIP}	V _{DD} =3.5V, V _{CS} =1.6V	T _{SIP} *70%	T _{SIP}	T _{OC} *130%	μs

Caution:

Since products are not screened at high and low temperatures, the specification for this temperature range is guaranteed by design, not tested in production.



Test Methods & Test Circuits

Remark:

Unless otherwise specified, the output voltage levels “H” and “L” at OC pin (V_{OC}) and OD pin (V_{OD}) are judged by the threshold voltage (1.0V) of the N-channel FET. Judge the OC pin level with respect to V_{CS} and the OD pin level with respect to V_{SS} .

(1) Overcharge detection voltage, overcharge release voltage (Test Circuit 1)

Overcharge detection voltage (V_{CU}) is defined as the voltage between the V_{DD} pin and V_{SS} pin at which V_{OC} goes from “H” to “L” when the voltage V_1 is gradually increased from the starting condition of $V_1=3.5V$. Overcharge release voltage (V_{CR}) is defined as the voltage between the V_{DD} pin and V_{SS} pin at which V_{OC} goes from “L” to “H” when the voltage V_1 is then gradually decreased.

(2) Overdischarge Detection Voltage, Overdischarge Release Voltage (Test Circuit 2)

Overdischarge detection voltage (V_{DL}) is defined as the voltage between the V_{DD} pin and V_{SS} pin at which V_{OD} goes from “H” to “L” when the voltage V_1 is gradually decreased from the starting condition of $V_1=3.5V$, $V_2=0V$. Overdischarge release voltage (V_{DR}) is defined as the voltage between the V_{DD} pin and V_{SS} pin at which V_{OD} goes from “L” to “H” when the voltage V_1 is then gradually increased.

(3) Discharge Overcurrent Detection Voltage (Test Circuit 2)

Discharge overcurrent detection voltage (V_{DIP}) is defined as the voltage between the CS pin and V_{SS} pin whose delay time for changing V_{OD} from “H” to “L” lies between the minimum and the maximum value of discharge overcurrent delay time when the voltage V_2 is increased rapidly (within 10 μs) from the starting condition of $V_1=3.5V$, $V_2=0V$.

(4) Load Short-circuiting Detection Voltage (Test Circuit 2)

Load short-circuiting detection voltage (V_{SIP}) is defined as the voltage between the CS pin and V_{SS} pin whose delay time for changing V_{OD} from “H” to “L” lies between the minimum and the maximum value of load short-circuiting delay time when the voltage V_2 is increased rapidly (within 10 μs) from the starting condition of $V_1=3.5V$, $V_2=0V$.

(5) Charge Overcurrent Detection Voltage (Test Circuit 2)

Charge overcurrent detection voltage (V_{CIP}) is defined as the voltage between the CS pin and V_{SS} pin whose delay time for changing V_{OC} from “H” to “L” lies between the minimum and the maximum value of charge overcurrent delay time when the voltage V_2 is decreased rapidly (within 10 μs) from the starting condition of $V_1=3.5V$, $V_2=0V$.

(6) Operating Current Consumption (Test Circuit 2)

The operating current consumption is the current that flows through the V_{DD} pin (I_{DD}) under the set conditions of $V_1=3.5V$ and $V_2=0V$ (normal status).

(7) Power-down Current Consumption (Test Circuit 2)

Standby function

The power-down current consumption is defined as the current that flows through the V_{DD} pin (I_{DD}) after the voltage V_2 rapidly increases (within 10 μs) from 0V to 2V, under the set conditions of $V_1=2V$, $V_2=0V$ (overdischarge status).

(8) Resistance between CS Pin and V_{DD} Pin (Test Circuit 3)

The resistance between CS pin and V_{DD} pin (R_{CSD}) is the resistance between CS pin and V_{DD} pin under the set conditions of $V_1=1.8V$, $V_2=0V$.

(9) Resistance between CS Pin and V_{SS} Pin (Test Circuit 3)



Lithium-ion / lithium polymer battery protection IC for single cell pack

The resistance between CS pin and V_{DD} pin (R_{CSS}) is the resistance between CS pin and V_{DD} pin under the set conditions of $V_1=1.8V$, $V_2=0V$.

(10) OC Pin Resistance “H” (Test Circuit 4)

The OC pin resistance “H” (R_{CH}) is the resistance at the OC pin under the set conditions of $V_1=3.5V$, $V_2=0V$, $V_3=3.0V$.

(11) OC Pin Resistance “L” (Test Circuit 4)

The OC pin resistance “L” (R_{CL}) is the resistance at the CO pin under the set conditions of $V_1=4.5V$, $V_2=0V$, $V_3=0.5V$.

(12) OD Pin Resistance “H” (Test Circuit 4)

The OD pin H resistance (R_{DH}) is the resistance at the OD pin under the set conditions of $V_1=3.5V$, $V_2=0V$, $V_4=3.0V$.

(13) OD Pin Resistance “L” (Test Circuit 4)

The OD pin L resistance (R_{DL}) is the resistance at the OD pin under the set conditions of $V_1=2.4V$, $V_2=0V$, $V_4=0.5V$.

(14) Overcharge Detection Delay Time (Test Circuit 5)

The overcharge detection delay time (T_{OC}) is the time needed for V_{OC} to change from “H” to “L” just after the voltage V_1 rapidly increases (within $10\mu s$) from overcharge detection voltage (V_{CU}) $-0.2V$ to overcharge detection voltage (V_{CU}) $+0.2V$ under the set condition of $V_2=0V$.

(15) Overdischarge Detection Delay Time (Test Circuit 5)

The overdischarge detection delay time (T_{OD}) is the time needed for V_{OD} to change from “H” to “L” just after the voltage V_1 rapidly decreases (within $10\mu s$) from overcharge detection voltage (V_{DL}) $+0.2V$ to overcharge detection voltage (V_{DL}) $-0.2V$ under the set condition of $V_2=0V$.

(16) Discharge Overcurrent Detection Delay Time (Test Circuit 5)

Discharge overcurrent detection delay time (T_{DIP}) is the time needed for V_{OD} to go to “L” after the voltage V_2 rapidly increases (within $10\mu s$) from $0V$ to $0.35V$ under the set conditions of $V_1=3.5V$, $V_2=0V$.

(17) Load Short-circuiting Detection Delay Time (Test Circuit 5)

Load short-circuiting detection delay time (T_{SIP}) is the time needed for V_{OD} to go to “L” after the voltage V_2 rapidly increases (within $10\mu s$) from $0V$ to $1.6V$ under the set conditions of $V_1=3.5V$, $V_2=0V$.

(18) Charge Overcurrent Detection Delay Time (Test Circuit 5)

Charge overcurrent detection delay time (T_{CIP}) is the time needed for V_{OC} to go to “L” after the voltage V_2 rapidly decreases (within $10\mu s$) from $0V$ to $-0.3V$ under the set conditions of $V_1=3.5V$, $V_2=0V$.

(19) 0 V Battery Charge Starting Charger Voltage (“Available”) (Test Circuit 2)

The 0V charge starting charger voltage (V_{0CH}) is defined as the voltage between the V_{DD} pin and CS pin at which V_{OC} goes to “H” ($V_{CS}+0.1V$ or higher) when the voltage V_2 is gradually decreased from the starting condition of $V_1=V_2=0V$.



Test Circuit

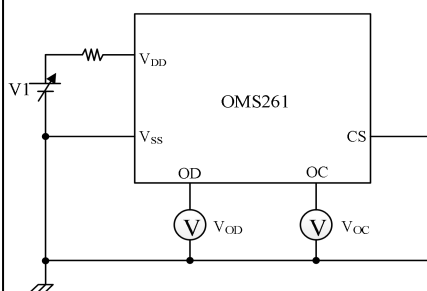


Figure 3 (Test Circuit 1)

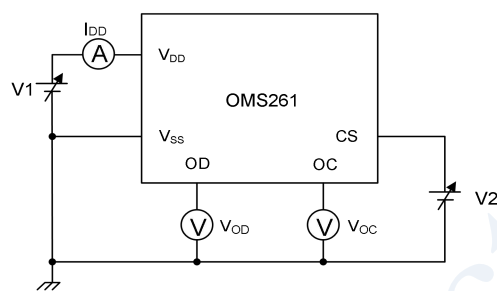


Figure 4 (Test Circuit 2)

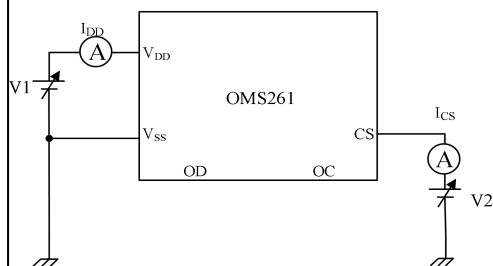


Figure 5 (Test Circuit 3)

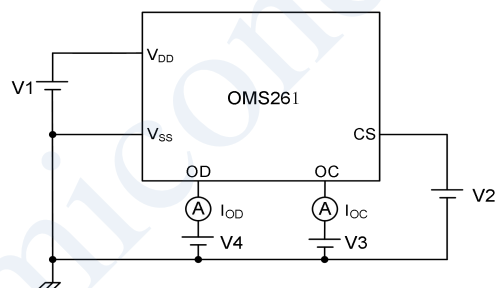


Figure 6 (Test Circuit 4)

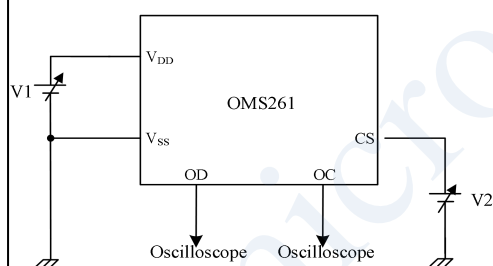


Figure 7 (Test Circuit 5)



TYPICAL APPLICATION

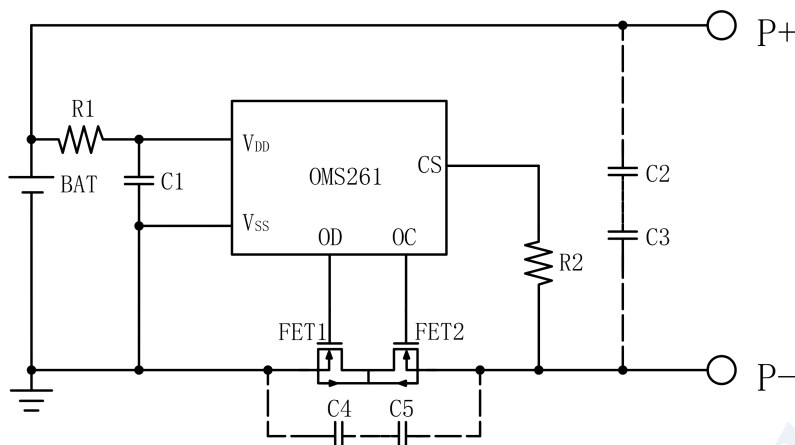


Figure 8

Table 6 Constants for External Components

Symbol	Device Name	Purpose	Min.	Typ.	Max	Remark
FET1	N-MOSFET	Discharge control	/	/	/	*1
FET2	N-MOSFET	Charge control	/	/	/	*2
R1	Resistor	Current limit, stabilize V _{DD} and strengthen ESD protection	100Ω	100Ω	330Ω	*3
R2	Resistor	Charger connect detection	300Ω	2kΩ	4kΩ	*4
R3	Resistor	Discharge, charge and short Current detection	-	-	-	*5
C1	Capacitor	Stabilize V _{DD}	0.022μF	0.1μF	1.0μF	*6
C2, C3	Capacitor	Enhanced ESD and EMI	/	0.1μF	/	*7
C4, C5	Capacitor	Enhanced anti surge capability	/	0.1μF	/	*8

APPLICATION HINTS:

- *1. If the FET with a threshold voltage which is equal to or higher than the over-discharge detection voltage is applied, discharging function may be stopped before over-discharge is detected.
- *2. If the FET's voltage tolerance between the gate and source is lower than the charger voltage, the FET may be destroyed.
- *3. R1 should be as small as possible to avoid lowering the overcharge detection accuracy due to current consumption. When a charger is connected in reverse; the current flows from the charger to the IC. At this time, if R1 has a high resistance, the voltage between V_{DD} pin and V_{SS} pin may exceed the absolute maximum rating.
- *4. If R2 has a resistance higher than 4kΩ, the charging current may not be cut when a high-voltage charger is connected. Please select as large a resistance as possible to prevent current when a charger is connected in reverse.
- *5. C1 will stabilize the supply voltage of V_{DD}; the value of C1 should be equal to or more than 0.022μF. C1 need close to V_{DD} pin
- *6. C2 C3 can be enhanced ESD and EMI, It's not necessary. It can be chosen according to the actual application scenarios
- *7. C4 C5 can be enhance the ability of surge current, It's not necessary. It can be chosen according to the actual application scenarios

Caution:

1. The above constants may be changed without notice.
2. It has not been confirmed whether the operation is normal or not in circuits other than the above example of connection. In addition, the example of connection shown above and the constant do not guarantee proper operation. Perform thorough evaluation using the actual application to set the constant.



OPERATION

Reference the “Typical Application”.

(1) Normal Status

The OMS261 monitors the voltage of the battery connected to V_{DD} and V_{SS} pins and the voltage difference between CS and V_{SS} pins to control charging and discharging. When the battery voltage is in the range from the overdischarge detection voltage (V_{DL}) to the overcharge detection voltage (V_{CU}) charger detection voltage (V_{CIP}) equal to or lower than a specified value, the IC turns both the charging and discharging control FETs on. This status is called normal status and in this status charging and discharging can be carried out freely. The resistance (R_{CSD}) between the CS pin and the V_{DD} pin, and the resistance (R_{CSS}) between the CS pin and the V_{SS} pin are not connected in the normal status.

Caution:

When the battery is connected for the first time, discharging may not be enabled. In this case, short the CS pin and the V_{SS} pin, or set the CS pin's voltage at the level of the charger detection voltage (V_{CIP}) or more and the discharge overcurrent detection voltage (V_{DIP}) or less by connecting the charger. The OMS261 Series then returns to the normal status.

(2) Overcharge status

When the battery voltage becomes higher than overcharge detection voltage (V_{CU}) during charging in the normal status and detection continues for the overcharge detection delay time (T_{OC}) or longer, the OMS261 Series turns the charging control FET off to stop charging. This condition is called the overcharge status. The resistance (R_{CSD}) between the CS pin and the V_{DD} pin, and the resistance (R_{CSS}) between the CS pin and the V_{SS} pin are not connected in the overcharge status.

The overcharge status is released in the following two cases:

- In the case that the CS pin voltage is higher than or equal to charger detection voltage (V_{CIP}), and is lower than the discharge overcurrent detection voltage (V_{DIP}), the OMS261 Series releases the overcharge status when the battery voltage falls below the overcharge release voltage (V_{CR}).
- In the case that the CS pin voltage is higher than or equal to the discharge overcurrent detection voltage (V_{DIP}), the OMS261 Series releases the overcharge status when the battery voltage falls below the overcharge detection voltage (V_{CU}). When the discharge is started by connecting a load after the overcharge detection, the CS pin voltage rises more than the voltage at the V_{SS} pin due to the V_f voltage of the parasitic diode. This is because the discharge current flows through the parasitic diode in the charging control FET. If the CS pin voltage is higher than or equal to the discharge overcurrent detection voltage (V_{DIP}), the OMS261 Series releases the overcharge status when the battery voltage is lower than or equal to the overcharge detection voltage (V_{CU}).

**Caution:**

- 1.If the battery is charged to a voltage higher than overcharge detection voltage (V_{CU}) and the battery voltage does not fall below overcharge detection voltage (V_{CU}) even when a heavy load is connected, discharge overcurrent detection and load short-circuiting detection do not function until the battery voltage falls below overcharge detection voltage (V_{CU}). Since an actual battery has an internal impedance of tens of $m\Omega$, the battery voltage drops immediately after a heavy load that causes overcurrent is connected, and discharge overcurrent detection and load short-circuiting detection function.
- 2.When a charger is connected after overcharge detection, the overcharge status is not released even if the battery voltage is below overcharge release voltage (V_{CR}). The overcharge status is released when the CS pin voltage goes over charger detection voltage (V_{CIP}) by removing the charger.

(3) Overdischarge status**With power-down function**

When the battery voltage falls below overdischarge detection voltage (V_{DL}) during discharging in the normal status and the detection continues for the overdischarge detection delay time (T_{OD}) or longer, the OMS261 Series turns the discharging control FET off to stop discharging. This condition is called the overdischarge status.

Under the overdischarge status, the CS pin voltage is pulled up by the resistor between the CS pin and the V_{DD} pin in the OMS261 Series (R_{CSD}). When voltage difference between the CS pin and the V_{DD} pin then is 1.3 V typ. or lower, the current consumption is reduced to the power-down current consumption (I_{PD}). This condition is called the power-down status. The resistance (R_{CSS}) between the CS pin and the V_{SS} pin is not connected in the power-down status and the overdischarge status.

The power-down status is released when a charger is connected and the voltage difference between the CS pin and the V_{DD} pin becomes 1.3 V typ. or higher. When a battery in the overdischarge status is connected to a charger and provided that the CS pin voltage is lower than the charger detection voltage (V_{CIP}), the OMS261 Series releases the overdischarge status and turns the discharging FET on when the battery voltage reaches overdischarge detection voltage (V_{DL}) or higher. When a battery in the overdischarge status is connected to a charger and provided that the CS pin voltage is not lower than the charger detection voltage (V_{CIP}), the OMS261 Series releases the overdischarge status when the battery voltage reaches overdischarge release voltage (V_{DR}) or higher.

Auto release function

When the battery voltage falls below the overdischarge detection voltage (V_{DL}) during discharging under the normal status and the detection continues for the overdischarge detection delay time (t_{DL}) or longer, the OMS261 Series turns the discharging control FET off to stop discharging. This status is called the overdischarge status. When the discharging control FET is turned off, the CS pin voltage is pulled up by the resistor between CS and VDD in the IC (R_{CSD}).

When the battery voltage becomes the overdischarge detection voltage (V_{DL}) or higher, the OMS261 Series turns the discharging FET on and returns to the normal status.



(4) Discharge overcurrent status (discharge overcurrent, load short-circuiting)

When a battery in the normal status is in the status where the voltage of the CS pin is equal to or higher than the discharge overcurrent detection voltage (V_{DIP}) because the discharge current is higher than the specified value and the status lasts for the discharge overcurrent detection delay time (T_{DIP}), the discharge control FET is turned off and discharging is stopped. This status is called the discharge overcurrent status.

In the discharge overcurrent status, the CS pin and the V_{SS} pin are shorted by the resistor between the CS pin and the V_{SS} pin (R_{CSS}) in the OMS261 Series. However, the voltage of the CS pin is at the V_{DD} potential due to the load as long as the load is connected. When the load is disconnected completely, the CS pin returns to the V_{SS} potential. If the OMS261 Series detects that the voltage of the CS pin returns to discharge overcurrent detection voltage (V_{DIP}) or lower, the discharge overcurrent status is restored to the normal status.

The OMS261 Series will be restored to the normal status from discharge overcurrent detection status even when the voltage of the CS pin becomes the discharge overcurrent detection voltage (V_{DIP}) or lower by connecting the charger. The resistance (R_{CSD}) between the CS pin and the V_{DD} pin is not connected in the discharge overcurrent detection status.

(5) Charge current status

When a battery in the normal status is in the status where the voltage of the CS pin is lower than the charge overcurrent detection voltage (V_{CIP}) because the charge current is higher than the specified value and the status lasts for the charge overcurrent detection delay time (T_{CIP}), the charge control FET is turned off and charging is stopped. This status is called the charge overcurrent status.

The OMS261 Series will be restored to the normal status from the charge overcurrent status when, the voltage at the CS pin returns to charge overcurrent detection voltage (V_{CIP}) or higher by removing the charger. The charge overcurrent detection function does not work in the overdischarge status. The resistance (R_{CSD}) between the CS pin and V_{DD} pin, and the resistance (R_{CSS}) between the CS pin and V_{SS} pin are not connected in the charge overcurrent status.

(6) 0 V battery charge function "available"

This function is used to recharge a connected battery whose voltage is 0 V due to self-discharge. When the 0 V battery charge starting charger voltage (V_{0CH}) or a higher voltage is applied between the P+ pin and P- pin by connecting a charger, the charging control FET gate is fixed to the V_{DD} pin voltage. When the voltage between the gate and source of the charging control FET becomes equal to or higher than the turn-on voltage due to the charger voltage, the charging control FET is turned on to start charging. At this time, the discharging control FET is off and the charging current flows through the internal parasitic diode in the discharging control FET. When the battery voltage becomes equal to or higher than overdischarge release voltage (V_{DR}), the OMS261 Series enters the normal status.

Caution:

1. Some battery providers do not recommend charging for a completely self-discharged battery. Please ask the battery provider to determine whether to enable or inhibit the 0 V battery charging function.
2. The 0 V battery charge function has higher priority than the charge overcurrent detection function. Consequently, a product in which use of the 0V battery charging function is enabled charges a battery forcibly and the charge overcurrent cannot be detected when the battery voltage is lower than overdischarge detection voltage (V_{DL}).

**(7) 0 V battery charge function "unavailable"**

This function is used to Inhibit recharge a battery whose voltage is 0 V due to self-discharge. When the 0V battery voltage is lower than 0V battery inhibit charge voltage (V_{0CH}), OMS261 series will inhibit to charger this battery.



PACKAGE SPECIFICATIONS

SOT23-6 PKG Dimensions (Unit: mm)


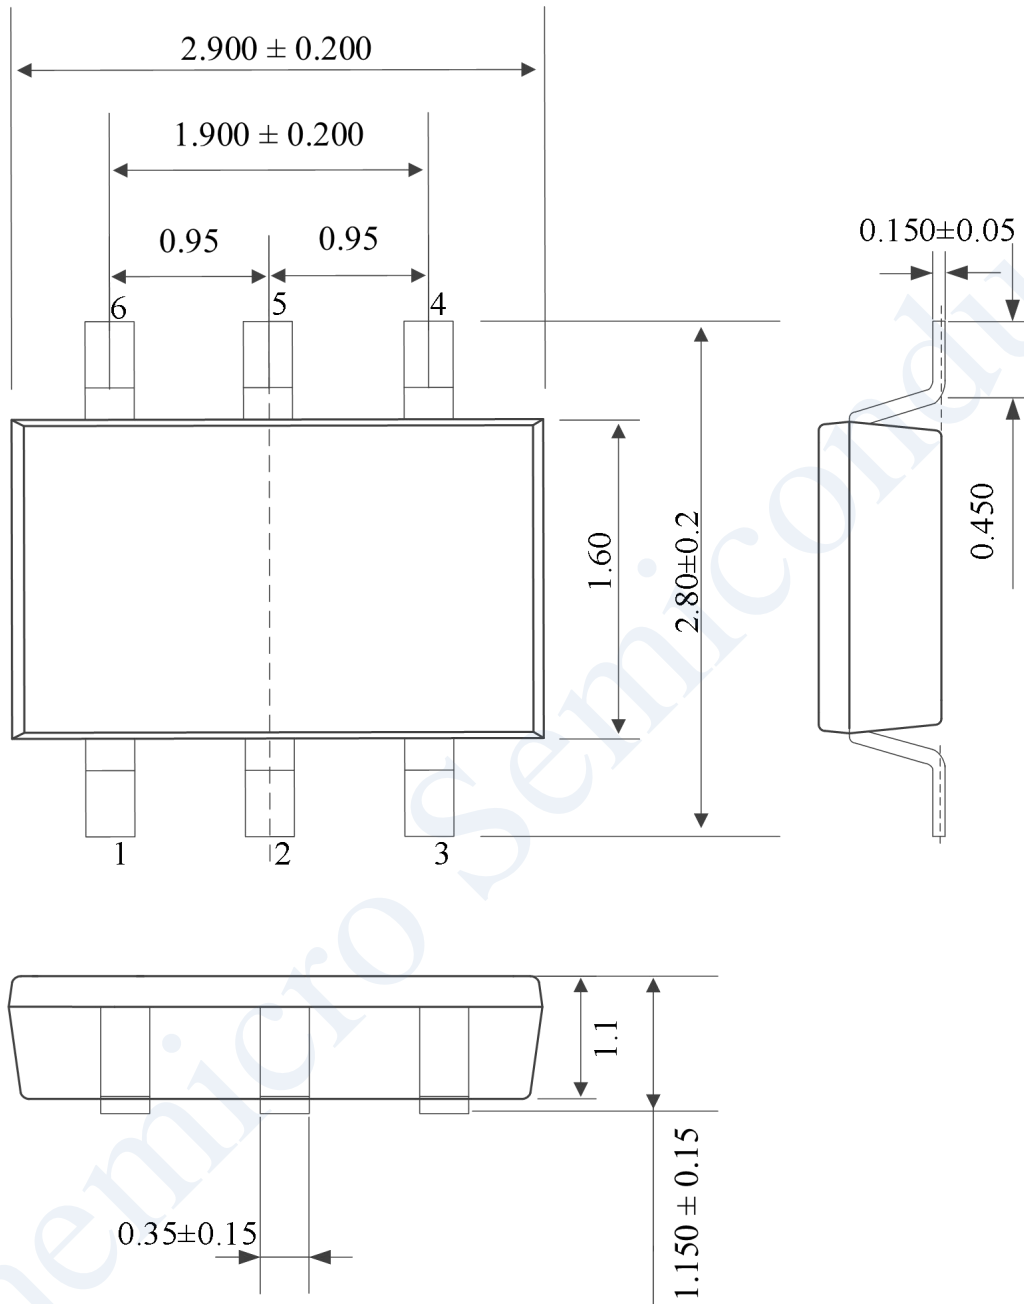


Figure 24 Package Specification

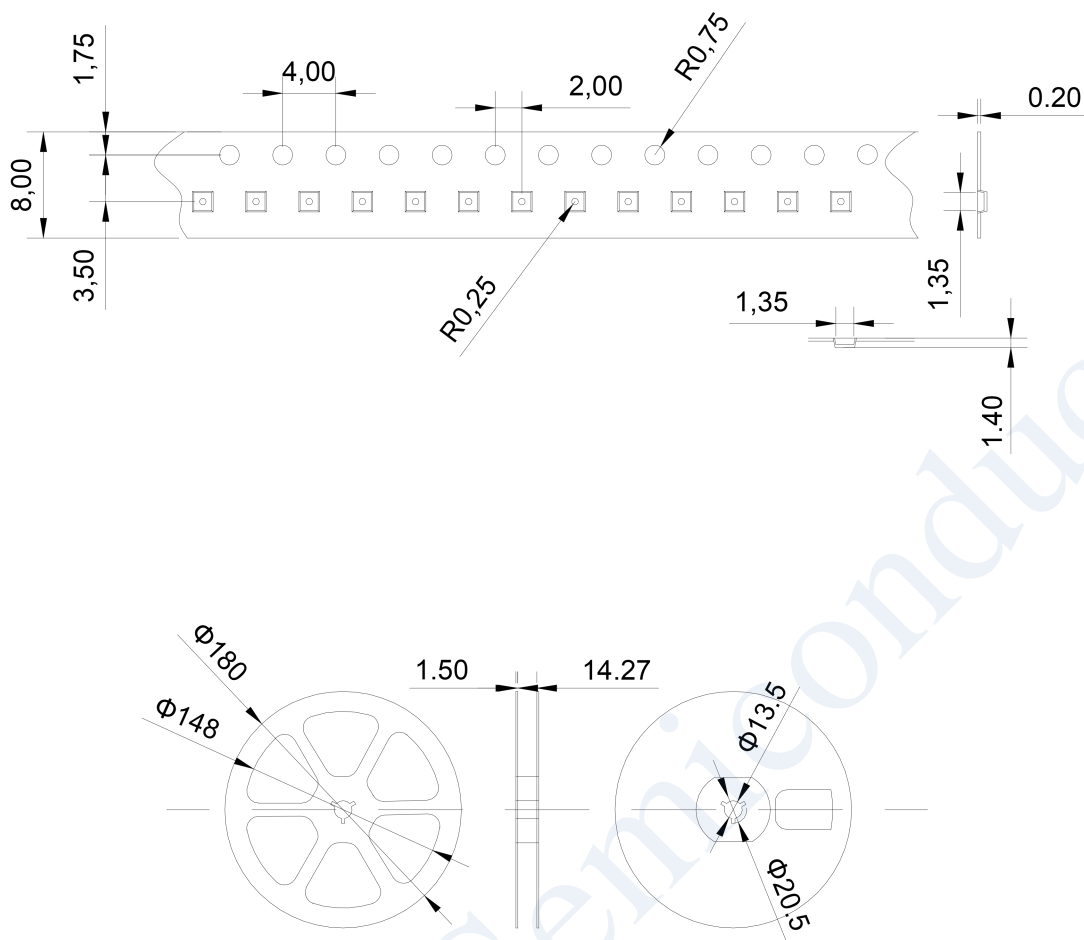

Note

- a) All dimensions are in millimeters;
- b) The pad color is silver.

**PRECAUTIONS:**

1. The application conditions for the input voltage, output voltage, and load current should not exceed the package power dissipation.
2. Do not apply an electrostatic discharge to this IC that exceeds the performance ratings of the built-in electrostatic protection circuit.
3. One-Micro Semiconductor claims no responsibility for any and all disputes arising out of or in connection with any infringement by products including this IC of patents owned by a third party.
4. The products are strictly prohibited from using, providing or exporting for the purposes of the development of weapons of mass destruction or military use. One-Micro Semiconductor is not liable for any losses, damages, claims or demands caused by any provision or export to the person or entity who intends to develop, manufacture, use or store nuclear, biological or chemical weapons or missiles, or use any other military purposes.
5. The products are not designed to be used as part of any device or equipment that may affect the human body, human life, or assets (such as medical equipment, disaster prevention systems, security systems, combustion control systems, infrastructure control systems, vehicle equipment, traffic systems, in-vehicle equipment, aviation equipment, aerospace equipment, and nuclear-related equipment), excluding when specified for in-vehicle use or other uses by One-Micro Semiconductor. Do not apply the products to the above listed devices and equipment. One-Micro Semiconductor is not liable for any losses, damages, claims or demands caused by unauthorized or unspecified use of the products.